

## Data Sheet

# Perforated Metal Plank Type BN-O

Perforated metal planks are an ideal supplement to the Lichtgitter flooring range. They are C-profiled, edged structural products produced on rolled formers and CNC punching machines. Perforated metal planks are characterised by their high slip resistance and where high loads are specified.

The perforated metal plank BN-O is characterised by punched holes pressed upwards. The holes punched upwards have a diameter of 8mm. This type of grating offers excellent stability with normal pedestrian traffic.

### Technical Details

Material	Steel, Stainless Steel, Aluminium AlMg3G22	<b>Standard</b>
Finish	Self Colour, Galvanised	BS EN ISO 1461
Height (H)	30mm, 50mm, 75mm, 100mm, 125mm & 150mm	
Material Thickness	1.5 to 2.5mm (dependant on material choice)	
Open Area	5%	
Slip Resistance, Surface Type	Galv, PTV 45 (Wet)	BS7976
Perforation Type	8mm Punched holes; 10mm Ball proof	BS EN ISO 14122
Standard Production Lengths (L)	10,000mm (Possible)	
Standard Production Widths (W)	150mm, 200mm, 250mm & 300mm	




### Loading

Max Clear Span (\*Clear distance between supports) Dependent on depth - Confirmation on application

Fixing Compatability Heavy Duty, Self Tapping Tek Screws

\*Supports must be fully supported on two opposing sides of the clear span

\*\* EN ISO 14122 states deflection between adjacent loaded and unloaded panels must not exceed 4mm

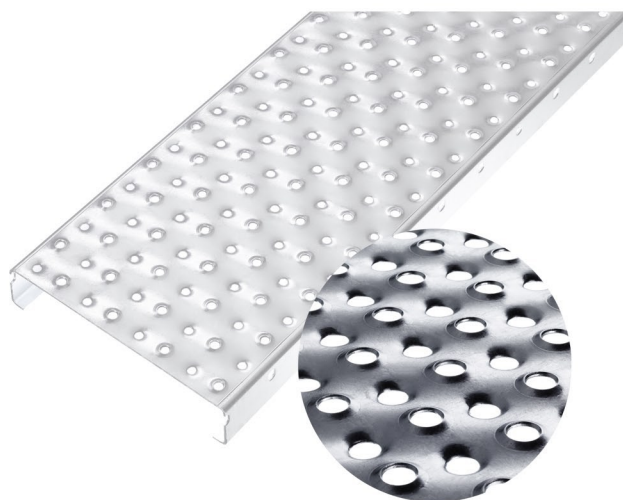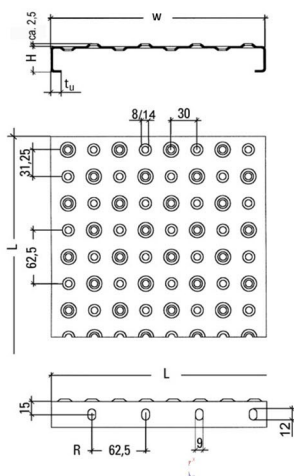

Fixing Type



Dome Head Tek Screw