

Data Sheet


Perforated Steel Plank Treads - BN-OP5H

BN-OP5H is the latest edition to Lichtgitters Perforated Plank tread range, based on our best selling BN-OP5 plank product. This tread is heel proof making it the perfect solution for use in public access areas with occasional use e.g. commercial fire escapes. With its 5mm holes it not only offers excellent slip resistant properties, but with its hole spacing configuration, offers excellent privacy by making it difficult to view from underneath.

The treads come supplied with pre drilled end plates and an integrated nosing ensuring persons with visual impairities are able to determine the front edge of the tread. The treads are designed in accordance with BS 14122 loading requirements.

Technical Details

Material	Steel or Aluminium	Standard
Finish	Self Colour, Galv,	BS EN ISO 1461
Height (H)	Typically 45mm	
Material Thickness	2mm, others possible	
Open Area	7.5%	
Slip Resistance, Surface Type	Galv, PTV 65 (Wet), Heel Proof	BS7976
Perforation Type	5mm Punched Holes	
Standard Stocked Depth	250mm & 275mm	
Standard Stocked Widths	6000mm	
Options	Welded / Bolted Riser Plates	

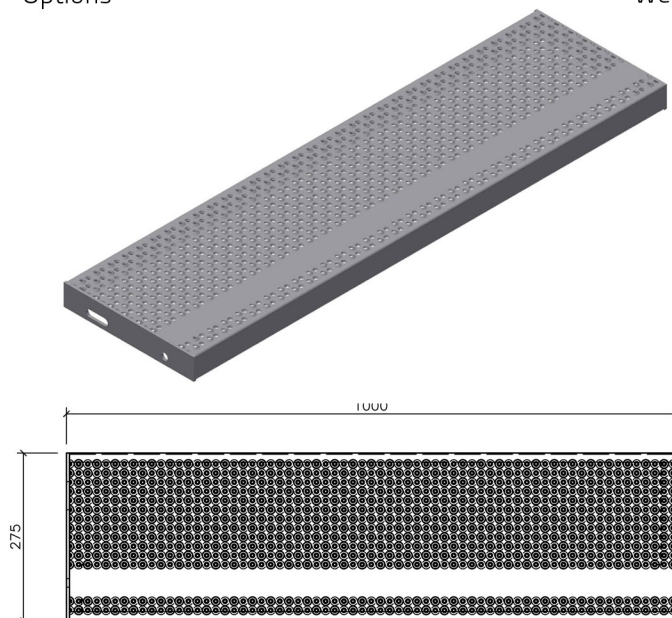

End Plate Details

